

Customer Information Sheet


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

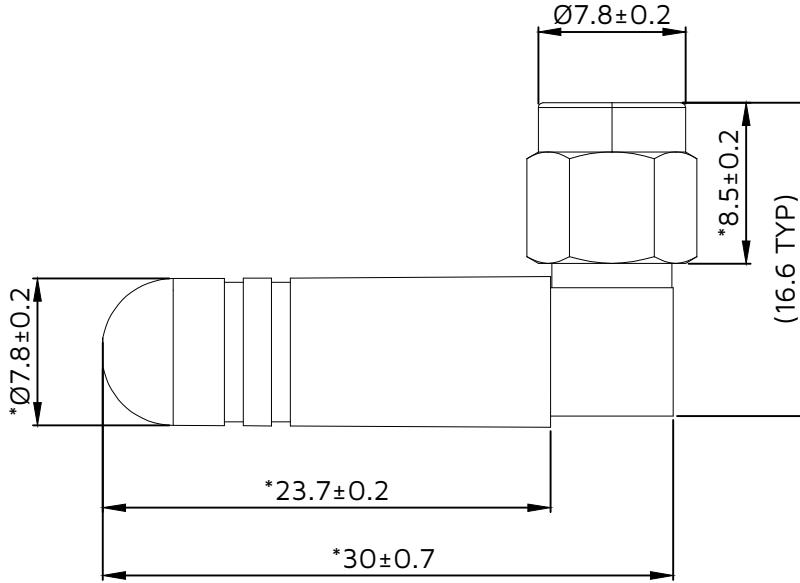

NOTE:

1. Frequency 2.4~2.5GHz 5~6GHz 6~7.125GHz
2. Peak Gain(Max): 2.4~2.5GHz 3.8dBi
5~6GHz 4.6dBi
6~7.125GHz 3.0dBi
3. The size marked with " * " is the key inspection size.
4. Operating with matching: -40°C~85°C
5. Storage with matching: -40°C~85°C
6. Impedance with matching: 500Ohms
7. Connector type: SMA(MALE)
8. Waterproof : IP66
9. The horizontal tension of the sheath and the joint shall meet: 30N Min, and the vertical thrust shall meet: 30N Min
10. Materials comply with RoHS and halogen-free standards (Cl < 900ppm Br < 900ppm Cl+Br < 1500ppm)

4	HANSBANG 8013 GLUE	0.02g	KC	1	03JUL25	--
3	ANTENNA JACKET	1PCS	NAME	ISS.	DATE	CN/CO
2	SPRING	1PCS	APPROVED: WALKER/MEIZY			
1	SMA RIGHT ANGLE (MALE)	1PCS	CHECKED: THIRI			
NO.	NAME	Q'TY	DRAWN: KC			

HARWIN

www.harwin.com

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.20mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL & FINISH:

TITLE: Wi-Fi Antenna, Small Stubby Form Factor, Right-Angle SMA Male Connector, Indoor Rated
DRAWING NUMBER: MMANT-1300900-SM1-000
SHT 1 OF 1