

# Customer Information Sheet


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

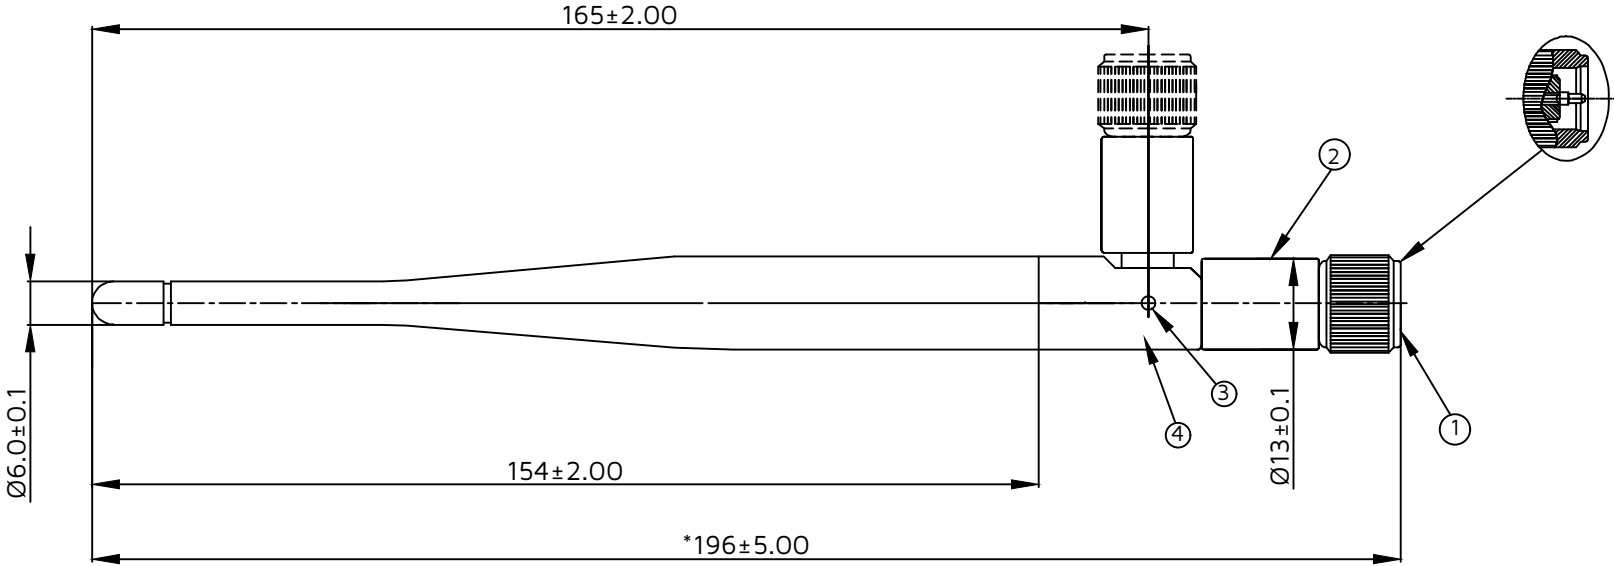

- NOTES:
- 1.Frequency; 500MHz-2000MHz  
845MHz-915MHz VSWR; 2.5
  2. The size marked with \* is the key inspection size.
  3. Materials comply with ROHS standards.
  4. Salt spray test needs to meet: 48H.
  5. The radio frequency range requirements should meet the specifications.
  6. The appearance of the product can not be damaged, and the appearance of the product has no color difference.

12	sheath	1PCS	Black
11	Ø6.0 Black sleeve	1PCS	L=50mm
10	Copper pipe	1PCS	Yellow
9	Ø2.5 Black sleeve	1PCS	L=15mm
8	RG316 Brown CABLE	1PCS	L=78mm
7	Copper pipe	1PCS	Yellow
6	RG178 Brown CABLE	1PCS	L=101mm
5	Teflon	1PCS	White
4	Middle seat	1PCS	Black
3	rivet	2PCS	Black
2	base	1PCS	Black
1	SMA (Surface Black Paint)	1PCS	Black
NO.	NAME	Q'TY	Remark

KC	1	03JUL25	--
NAME	ISS.	DATE	CN/CO
APPROVED: WALKER/MEIZY			
CHECKED: THIRI			
DRAWN: KC			

HARWIN

www.harwin.com

TOLERANCES  
X. = ±1mm  
X.X = ±0.50mm  
X.XX = ±0.20mm  
X.XXX = ±0.01mm  
ANGLES = ±5°  
UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL & FINISH:

TITLE:

LTE Antenna, SMA Male Hinge Connector,  
Indoor Rated

DRAWING NUMBER:

MMANT-1401000-SM1-000

SHT  
1  
OF  
1