

Customer Information Sheet


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

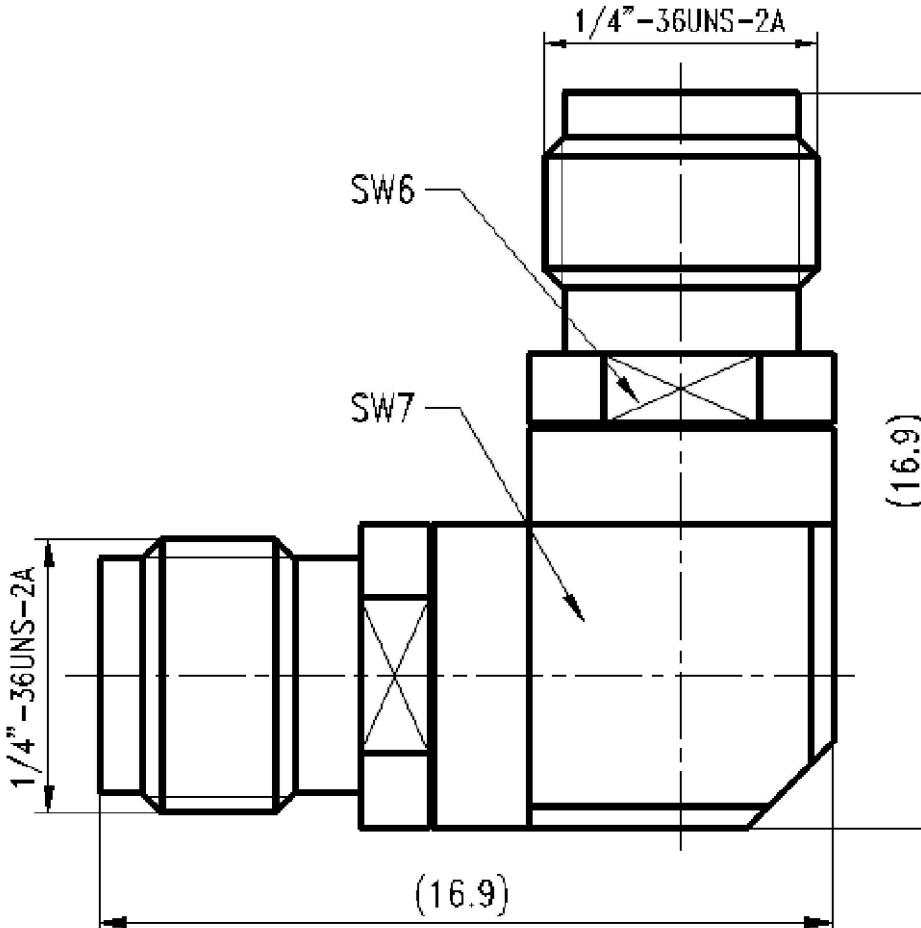

NAME	ISS.	DATE	CN/CO
APPROVED:			
CHECKED:			
DRAWN:			

Material and coating

Outer conductor	Stainless steel <u>passivation</u>
Inner conductor	Beryllium copper gold plating & brass gold plating
Medium body	PEI

Electrical performance

Characteristic impedance	50Ω
Usage frequency	10MHz~26.5GHz
Insulation resistance	≥ 5000MΩ
Dielectric withstand voltage	750Vrms
Contact resistance	Central conductor ≤ 3mΩ, Outer conductor ≤ 2.5mΩ
VSWR	≤ 1.2
Insertion loss	≤ 0.08~/f(GHz)dB

HARWIN

www.harwin.com

TOLERANCES

X. = ±1mm
 X.X = ±0.50mm
 X.XX = ±0.10mm
 X.XXX = ±0.01mm

ANGLES = ±5°
 UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL & FINISH:

TITLE:

KWKG Type, Jack - Jack, Curved Adapter, 50 ohm

DRAWING NUMBER:

MMCN-1000BK-RA-001

SHT
1
OF
1