

Customer Information Sheet


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

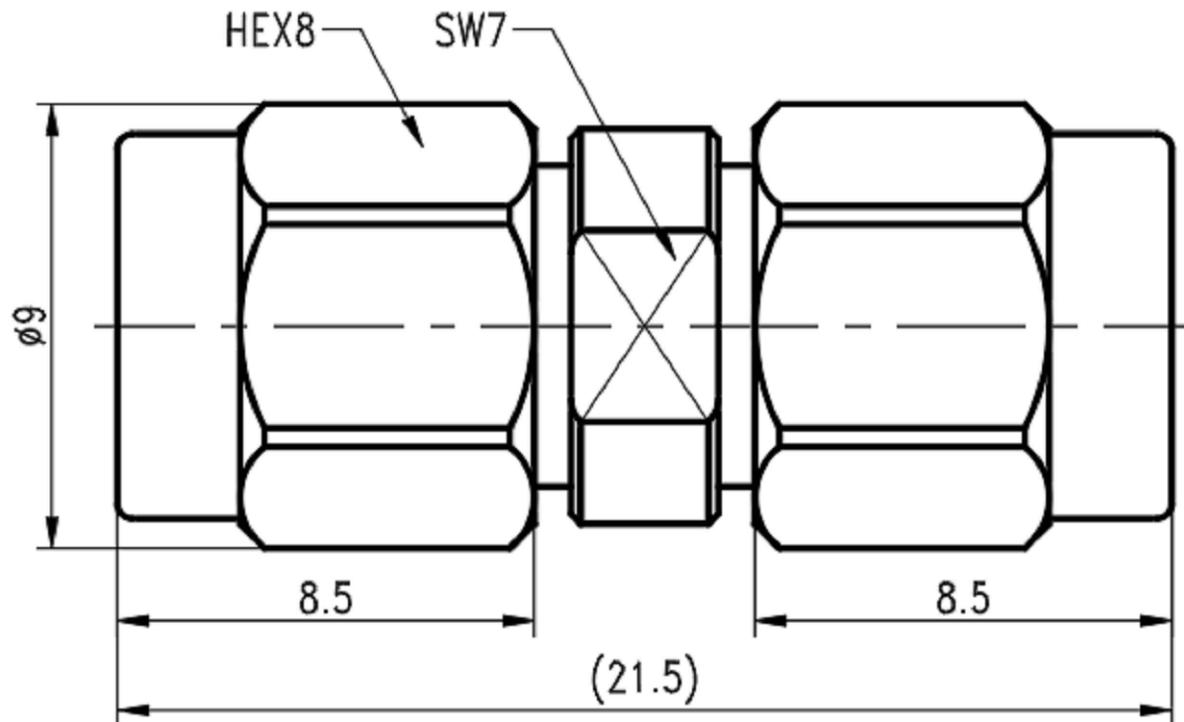

Material and coating

Outer conductor: Stainless steel passivation

Inner conductor: Gold-plated brass

Medium body: PEI

Electrical performance

Characteristic impedance: 50Ω

Usage frequency: 10MHz~26.5GHz

Insulation resistance: ≥5000MΩ

Dielectric withstand voltage: 1000Vrms

Contact resistance: Central conductor ≤3mΩ, Outer conductor ≤2.5mΩ

VSWR: ≤1.15

Insertion loss: ≤0.05./f(GHz)dB

NAME	ISS.	DATE	CN/CO
APPROVED:			
CHECKED:			
DRAWN:			

HARWIN

www.harwin.com

TOLERANCES

X. = ±1mm
 X.X = ±0.50mm
 X.XX = ±0.10mm
 X.XXX = ±0.01mm
 ANGLES = ±5°
 UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL & FINISH:

TITLE: JJG Type, Plug - Plug, Straight Adapter, 50 ohm

DRAWING NUMBER: MMCN-1001BK-ST-001

SHT 1 OF 1