

# Customer Information Sheet


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

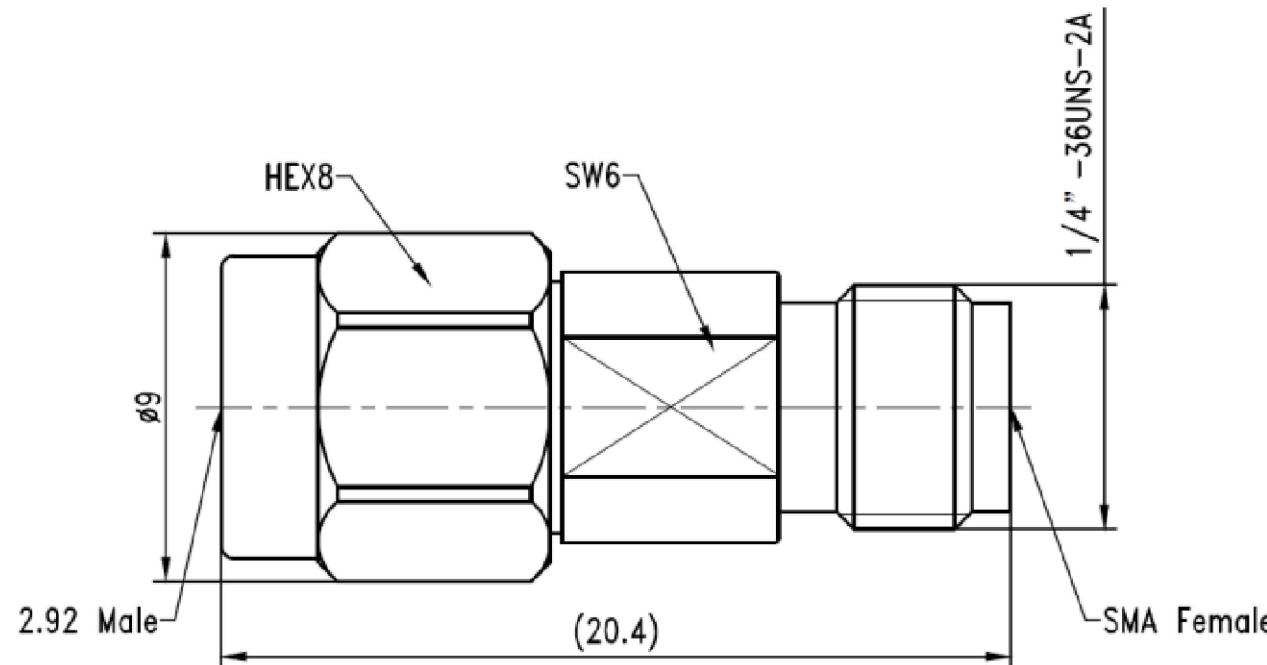

## Material and coating

Outer conductor	Stainless steel <u>passivation</u>
Inner conductor	Beryllium copper gold plating
Medium body	PEI、PTFE

## Electrical performance

Characteristic impedance	50Ω
Usage frequency	10MHz~18GHz
Insulation resistance	≥ 5000MΩ
Dielectric withstand voltage	1000Vrms
Contact resistance	Central conductor≤3mΩ, Outer conductor≤2.5mΩ
VSWR	≤ 1.15
Insertion loss	≤ 0.05 √f(GHz)dB

NAME	ISS.	DATE	CN/CO
APPROVED:			
CHECKED:			
DRAWN:			

**HARWIN**

[www.harwin.com](http://www.harwin.com)

## TOLERANCES

X. =  $\pm 1$ mm  
 X.X =  $\pm 0.50$ mm  
 X.XX =  $\pm 0.10$ mm  
 X.XXX =  $\pm 0.01$ mm

ANGLES =  $\pm 5^\circ$   
 UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

## MATERIAL & FINISH:

## TITLE:

RF / Coaxial Adapter, MA, Plug - Jack, St  
 straight Adapter, 50 ohm

## DRAWING NUMBER:

MMCN-1601BK-ST-001

SHT  
 1  
 OF  
 1