

Customer Information Sheet


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

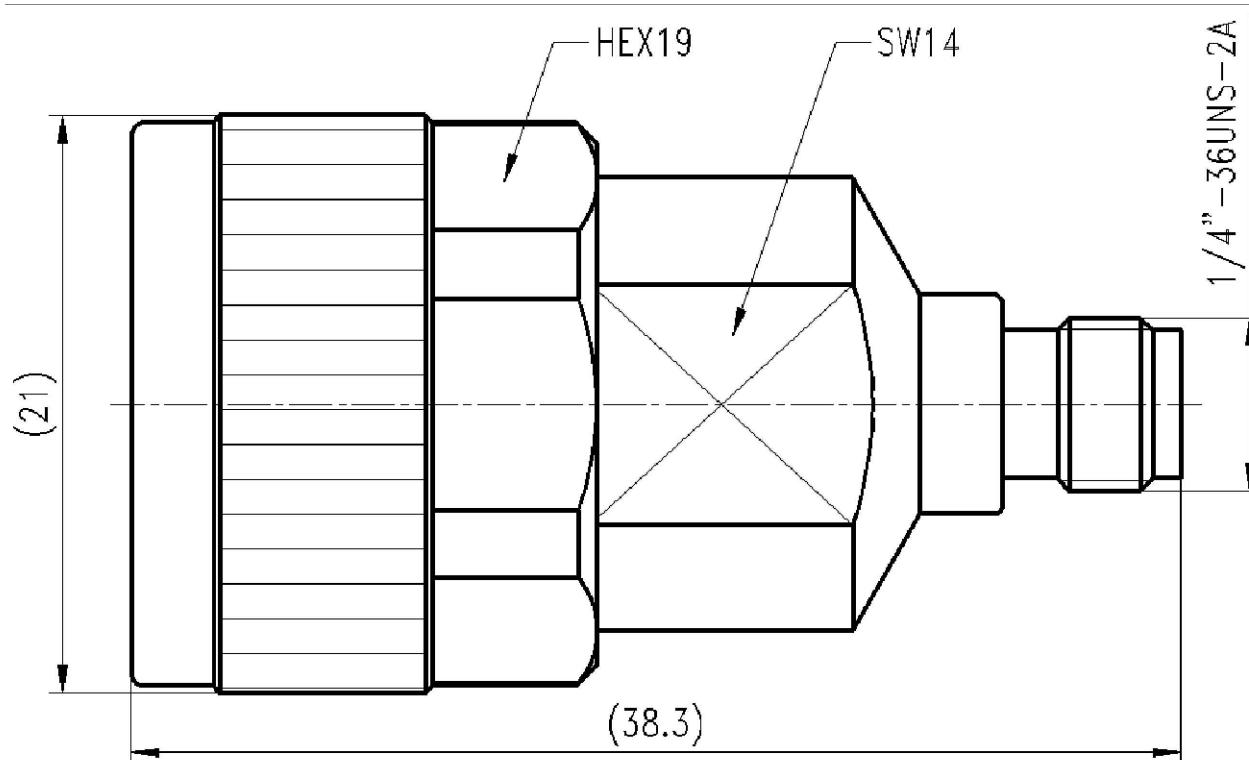

Electrical performance

Characteristic impedance	50Ω
Usage frequency	10MHz~18GHz
Insulation resistance	≥5000MΩ
Dielectric withstand voltage	1000Vrms
Contact resistance	Central conductor≤3mΩ, Outer conductor≤2.5mΩ
VSWR	≤1.15
Insertion loss	≤0.04/f(GHz)dB

Mechanical performance

Meshing force and separation force	≤0.23Nm
Connection torque	0.79Nm~1.13Nm
Torque resistance of the connection mechanism	N end: 1.69 Nm
The fixity of the central contact piece	≥27N
Durability	500 time
The holding force of the connecting mechanism	N end: ≥450N

NAME	ISS.	DATE	CN/CO
APPROVED:			
CHECKED:			
DRAWN:			

HARWIN

www.harwin.com

TOLERANCES
 X. = ±1mm
 X.X = ±0.50mm
 X.XX = ±0.10mm
 X.XXX = ±0.01mm
 ANGLES = ±5°
 UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL & FINISH:

TITLE:
 N Type, Plug - Jack, Straight Adapter,
 50 ohm

DRAWING NUMBER:
 MMCN-2001BK-ST-001

SHT
 1
 OF
 1